


8153

eslingas para elevação de verde 2t fita de duas camadas, buracos reforçados, alta tenacidade de poliéster (PES)

CE

UNI EN 1492-1

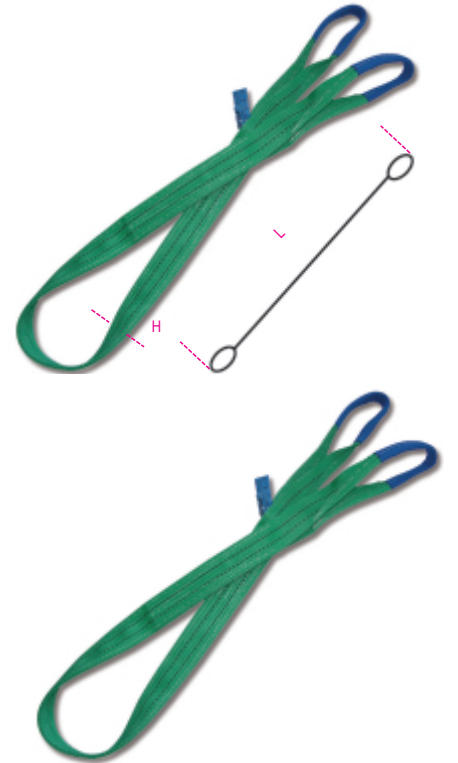

art.	L m	H mm	WLL ton
081530010	1	60	2
081530015	1,5	60	2
081530020	2	60	2
081530025	2,5	60	2
081530035	3,5	60	2
081530030	3	60	2
081530040	4	60	2
081530050	5	60	2
081530060	6	60	2
081530080	8	60	2
081530100	10	60	2

			$\beta=0^\circ+45^\circ$	$\beta=45^\circ+60^\circ$
30	1t	0,8t	2t	1,4t
60	2t	1,6t	4t	2,8t
90	3t	2,4t	6t	4,2t
120	4t	3,2t	8t	5,6t
150	5t	4,0t	10t	7,0t
180	6t	4,8t	12t	8,4t
240	8t	6,4t	16t	11,2t
300	10t	8,0t	20t	14,0t