

COLD WATER – FOUR WHEELS

## The **medium quadro-Series**

### Integrated Hose drum

Practical design and features a longer length high-pressure hose complete with folding crank

### Total-stop system with delayed motor cut-off

Auto-shutdown feature improves seal lifespan and reduces power consumption

### Pressure regulation

Fully adjustable control allows operating pressures to be set to suit any task

### Integrated water tank

Prevents damage to the high-pressure pump caused by a lack of water

### Roto-Mold-Chassis


Virtually indestructible

### Cleaning Agent Intake

Injector system for dispensing of cleaning agents



Figures: quadro 799 TST

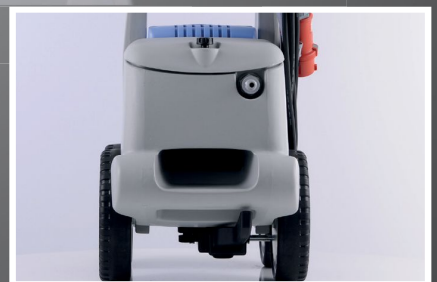



		quadro 599 TST	quadro 799 TST	quadro 899 TST
<b>Technical specifications</b>				
Operating pressure adjustable	bar / MPa	30-150 / 3-15	30-180 / 3-18	30-150 / 3-15
Max. admissible overpressure	bar / MPa	165 / 16.5	200 / 20	170 / 17
Connected load	V / ~ / Hz / A	230 / 1 / 50 / 14	400 / 3 / 50 / 8.5	400 / 3 / 50 / 8.5
Motor speed	Rpm	1400	1400	1400
Water output	l/min   l/h	10   600	13   780	15   900
Power intake / Power output	kW   kW	3.3   2.4	5.5   4.0	5.5   4.0
Volume water tank	l	10	10	10
Power supply cable	m	5	7.5	7.5
Dimensions L x W x H	mm	780 / 395 / 870	780 / 395 / 870	780 / 395 / 870
Weight	kg	62	62	62
Cleaning Agent Intake		●	●	●
<b>Equipment</b>				
Hose drum		●	●	●
Steel braided high-pressure hose	m	20	20	15
Trigger gun with safety catch	Model	M2000	M2000	M2000
Dirtkiller lance	Nozzle size	● O35	● O45	● O6
Stainless steel lance with flat jet nozzle	Nozzle size	● M20035	● M20045	● D2506
<b>Ord.no.</b>		<b>40431</b>	<b>40432</b>	<b>40434</b>

Fig. Non-marking version (NoM). Info on page 58



For detailed technical information, see page 78-79